


JING-ZHANG OPERATING LAYER ON APPROVED CONTEXT

Planning is the credible base; the civic cross and stations are the design protagonists

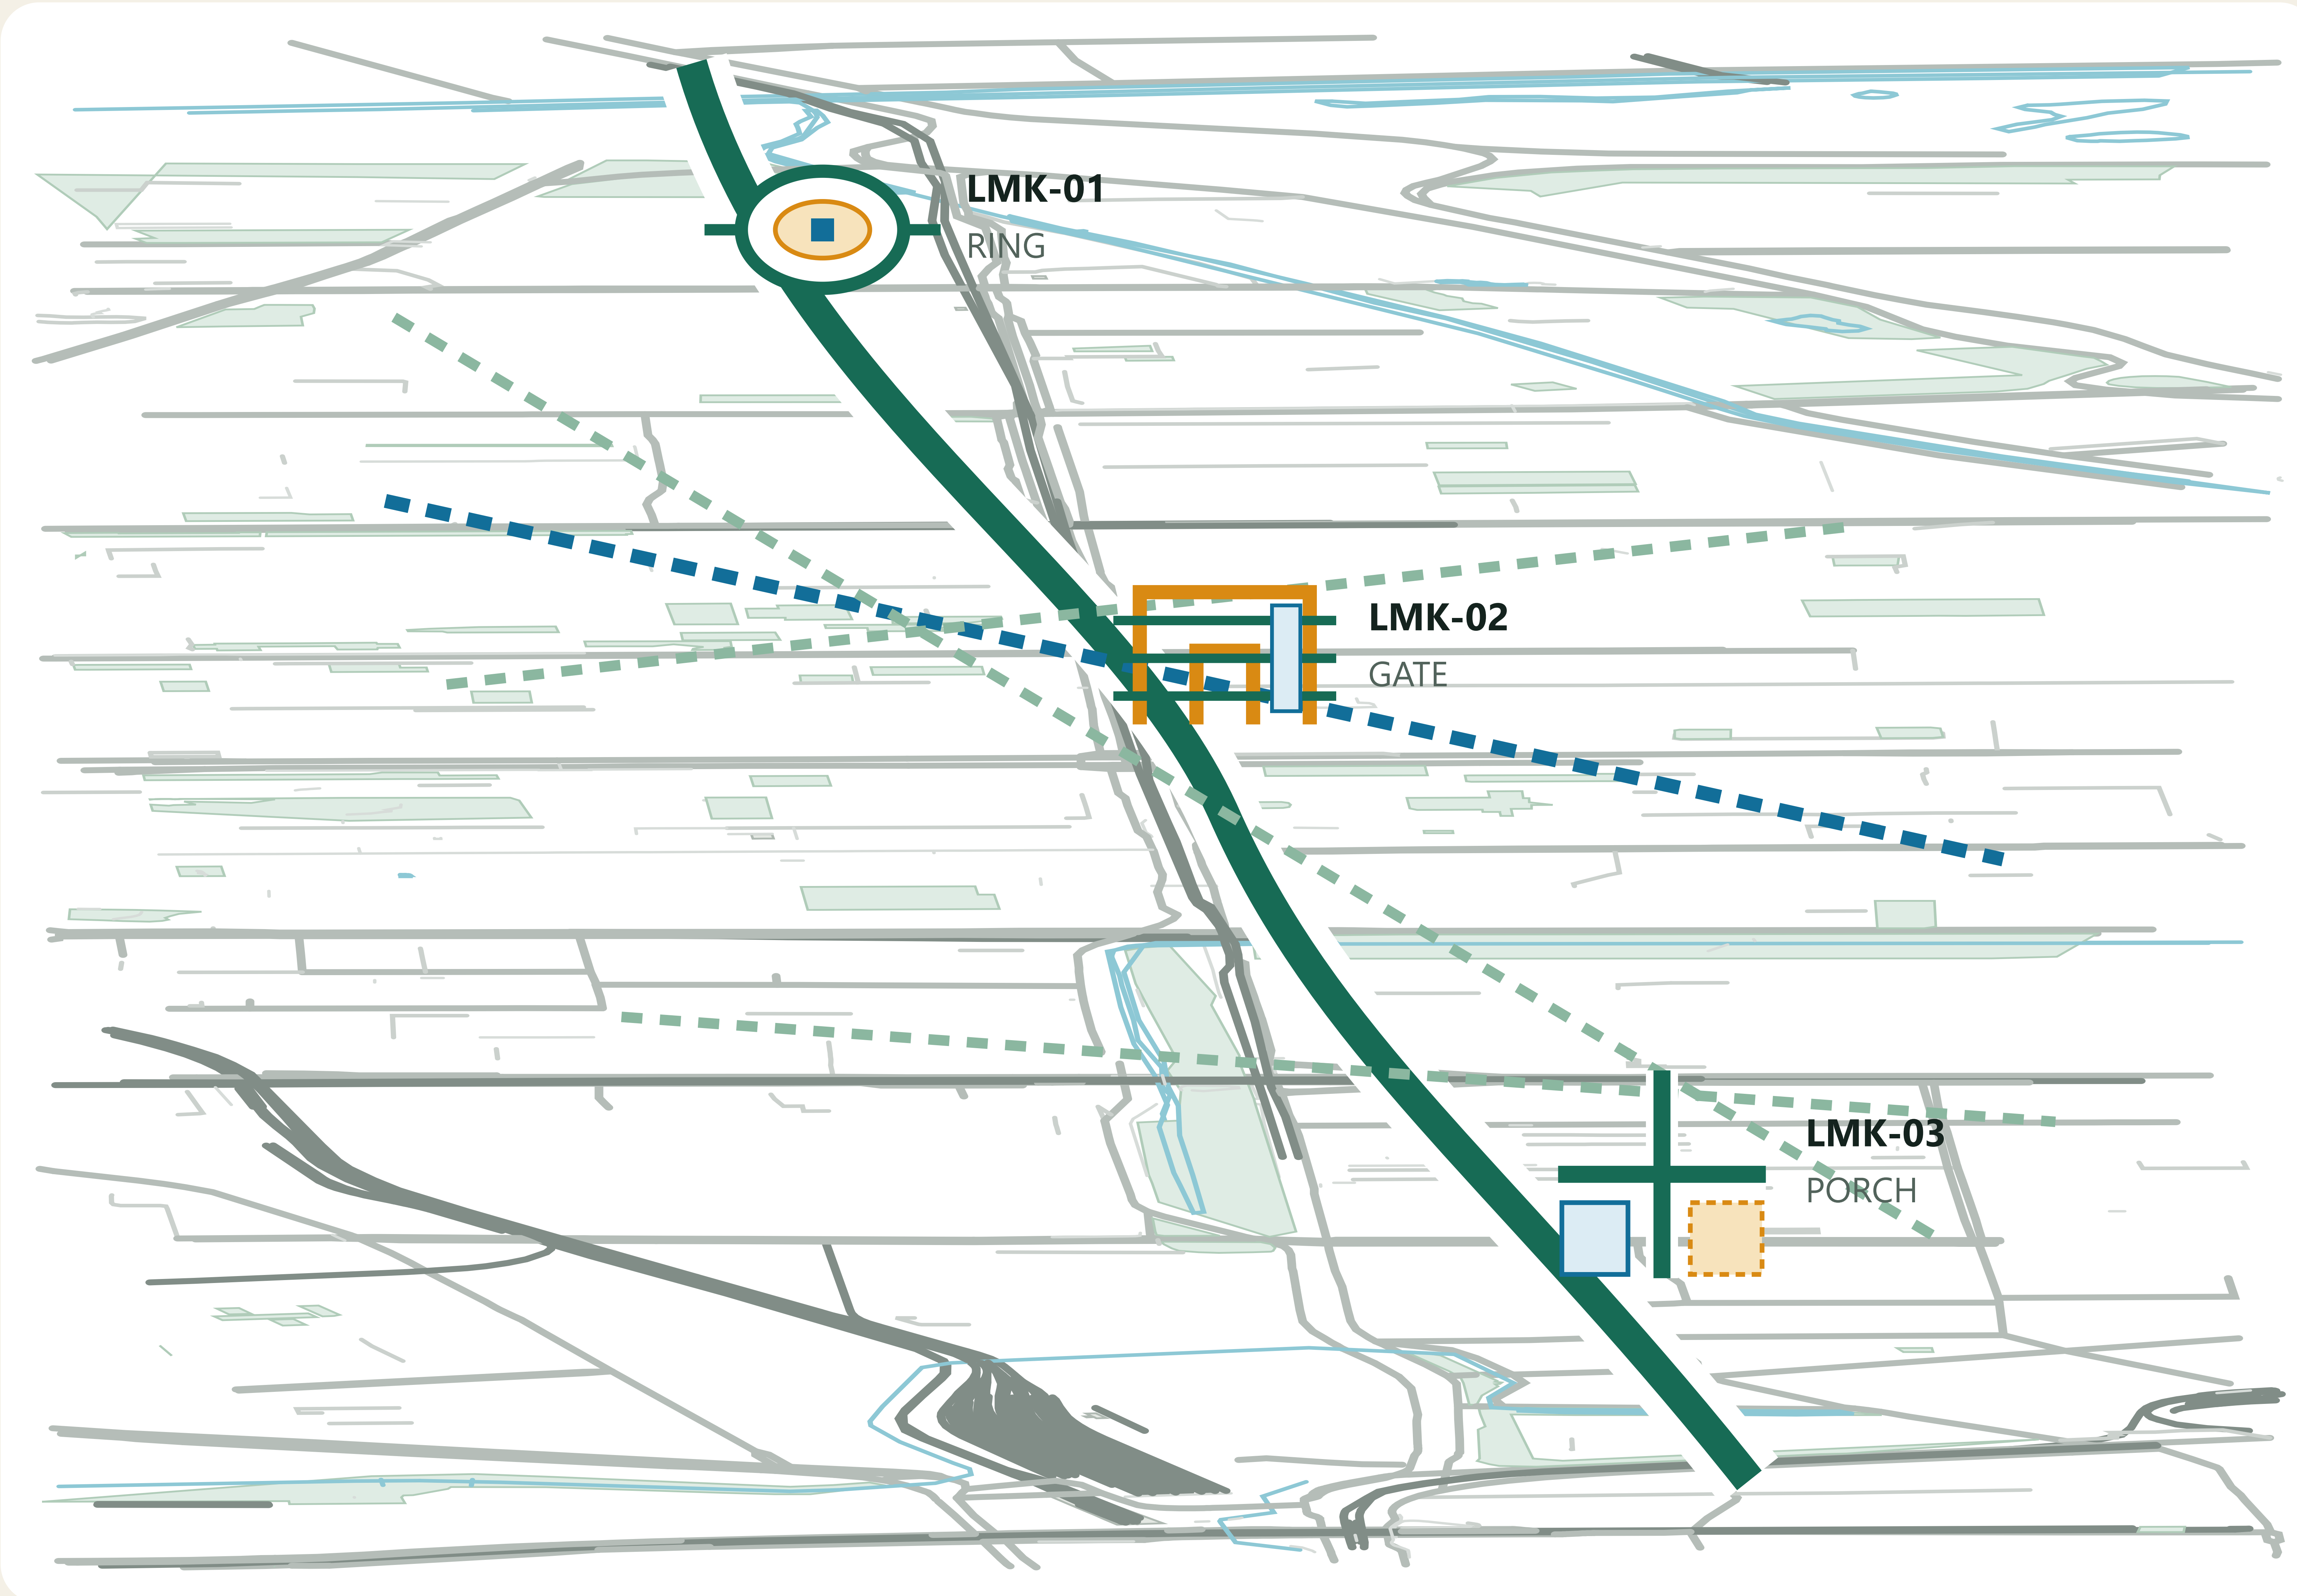

PUBLISHED GREEN BELT

spine/stations/wings =
stoppable, removable
overlay

EXISTING / PUBLISHED

9 km belt, slow-mobility links,
Dazhongsi centre

DESIGN PROPOSAL

4 m route, one-side bay,
staffed Porch

INTERFACE WINDOWS

Ring bypass / Gate passage /
Porch cross

UNKNOWN


survey, title, entrances,
utilities, permits

Map data © OpenStreetMap contributors · ODbL · 2026-08-13




ORDINARY OPEN DAY


CONCEPT-GENERATED / NOT FIELD EVIDENCE; use vector model for dimensions

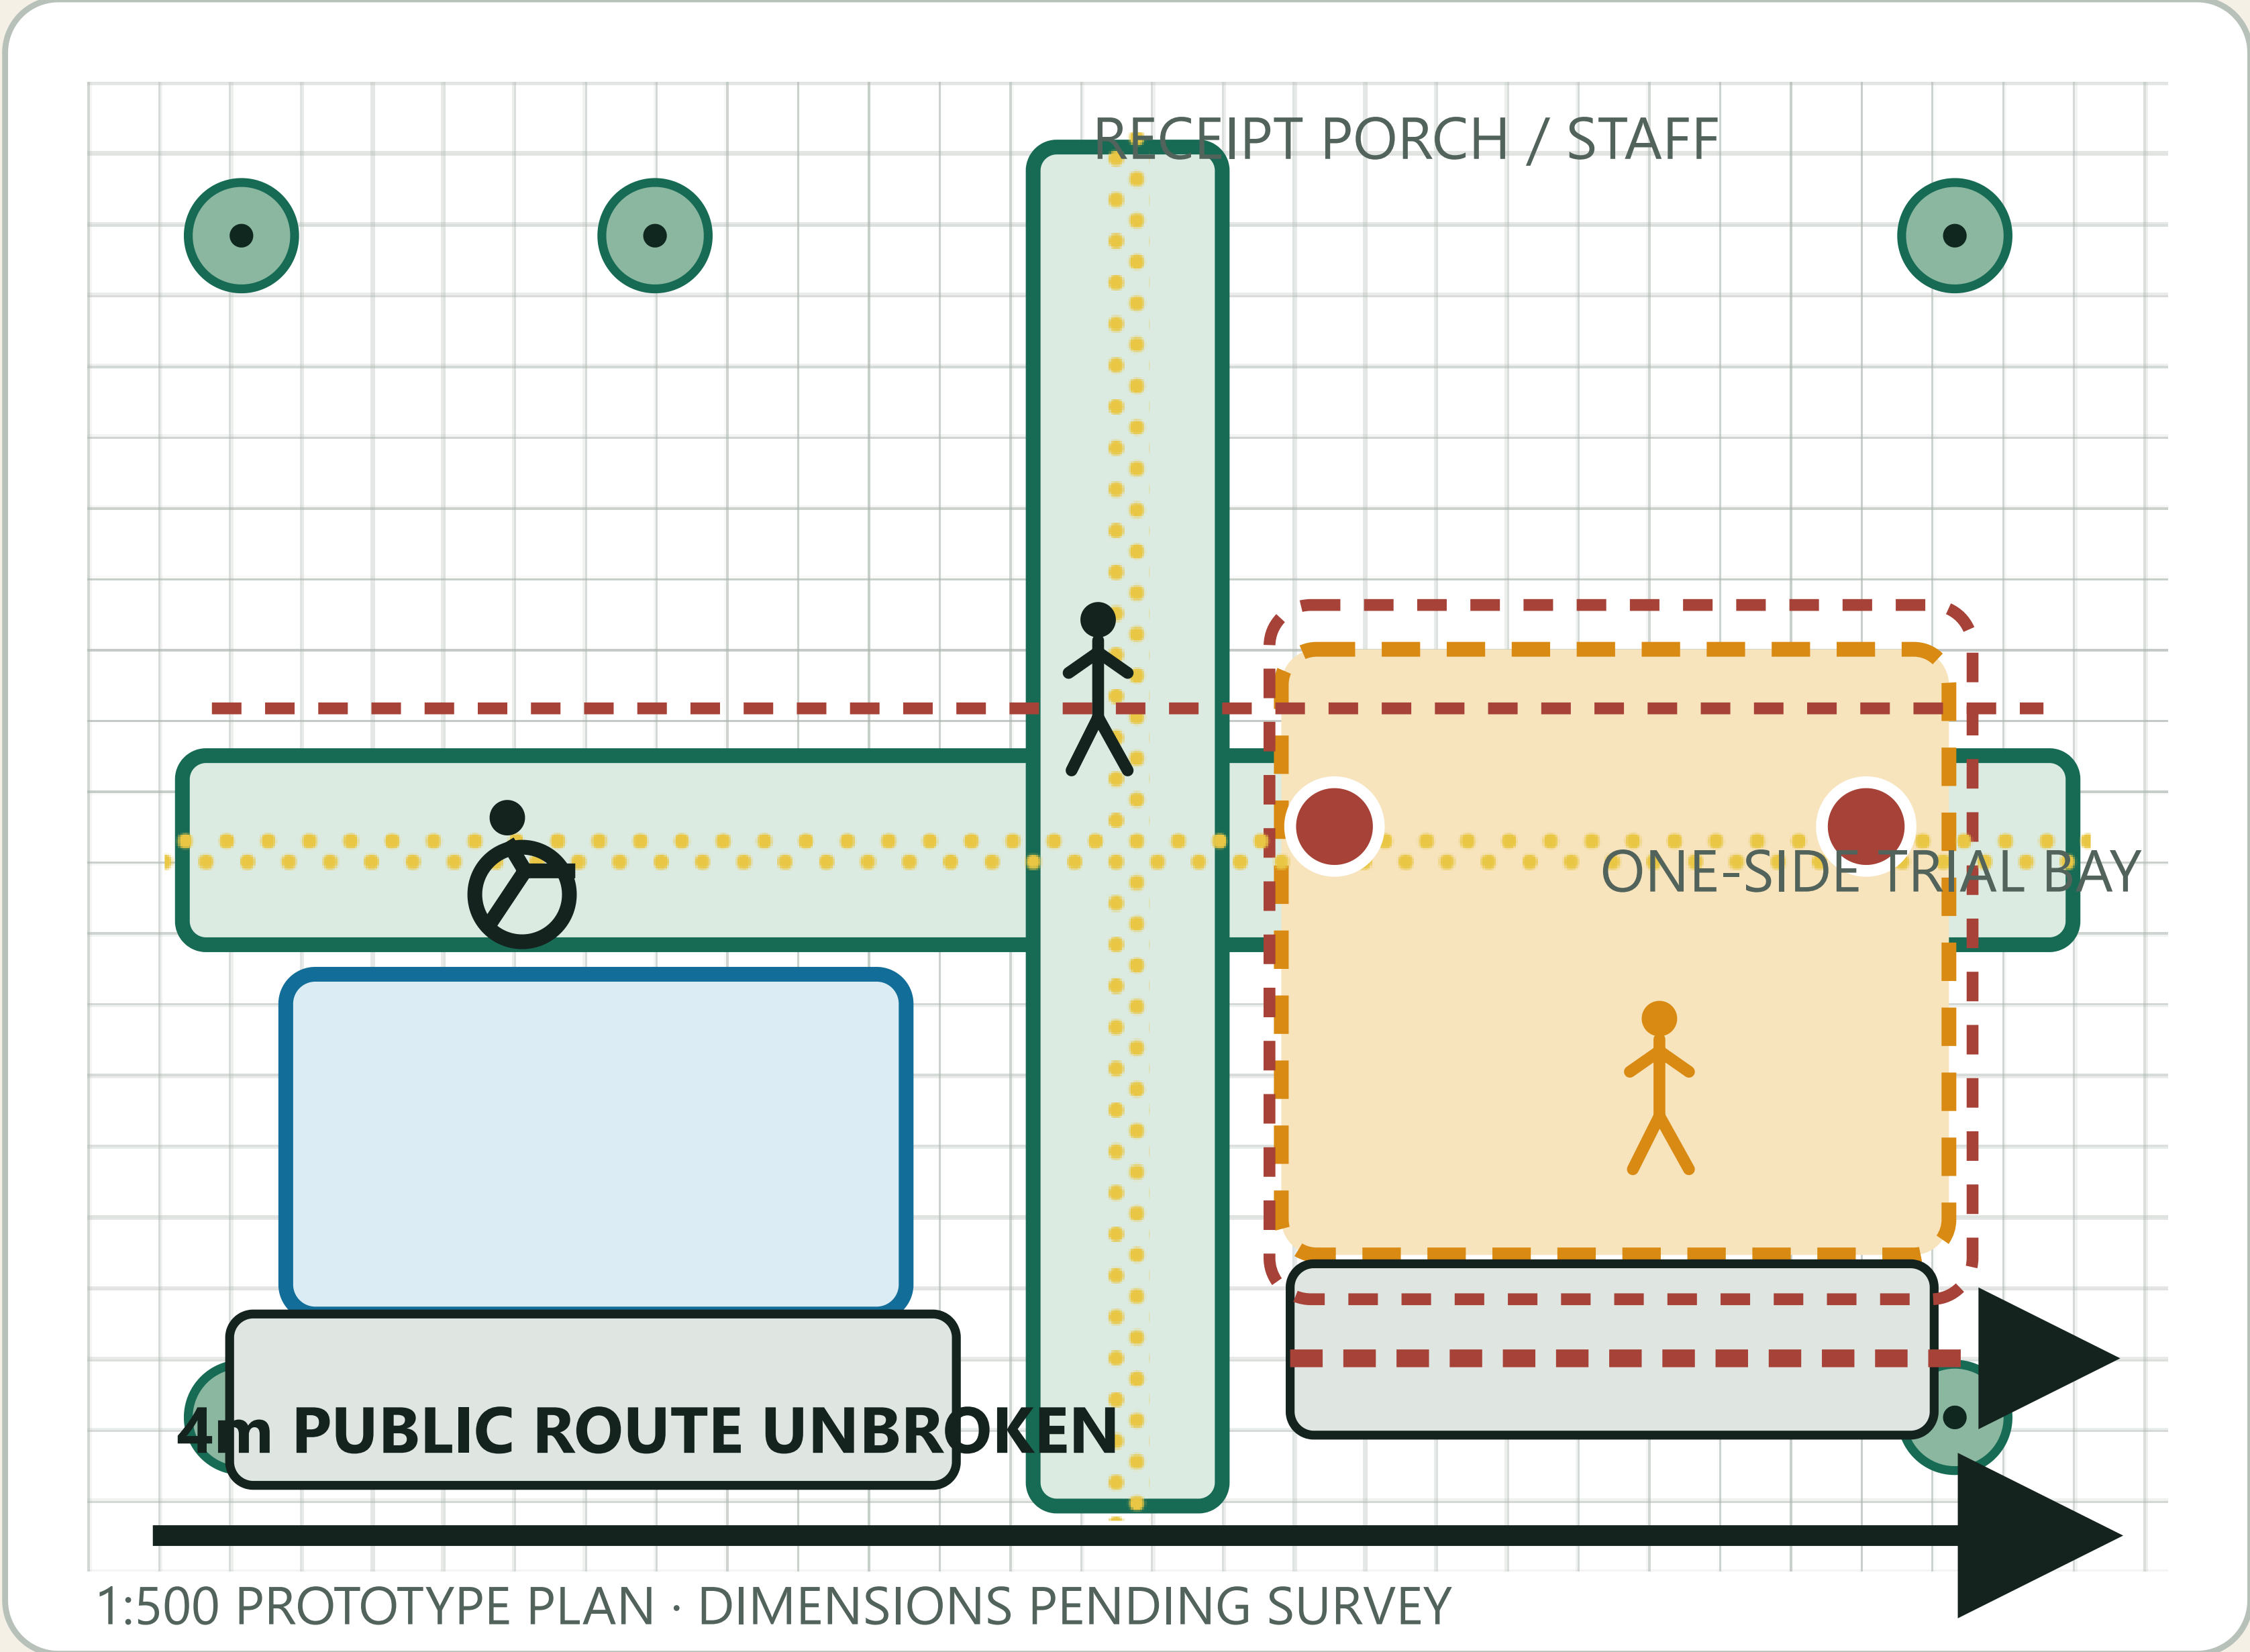



ONE SPATIAL MODEL · LAYERED CUTAWAY ASSEMBLY

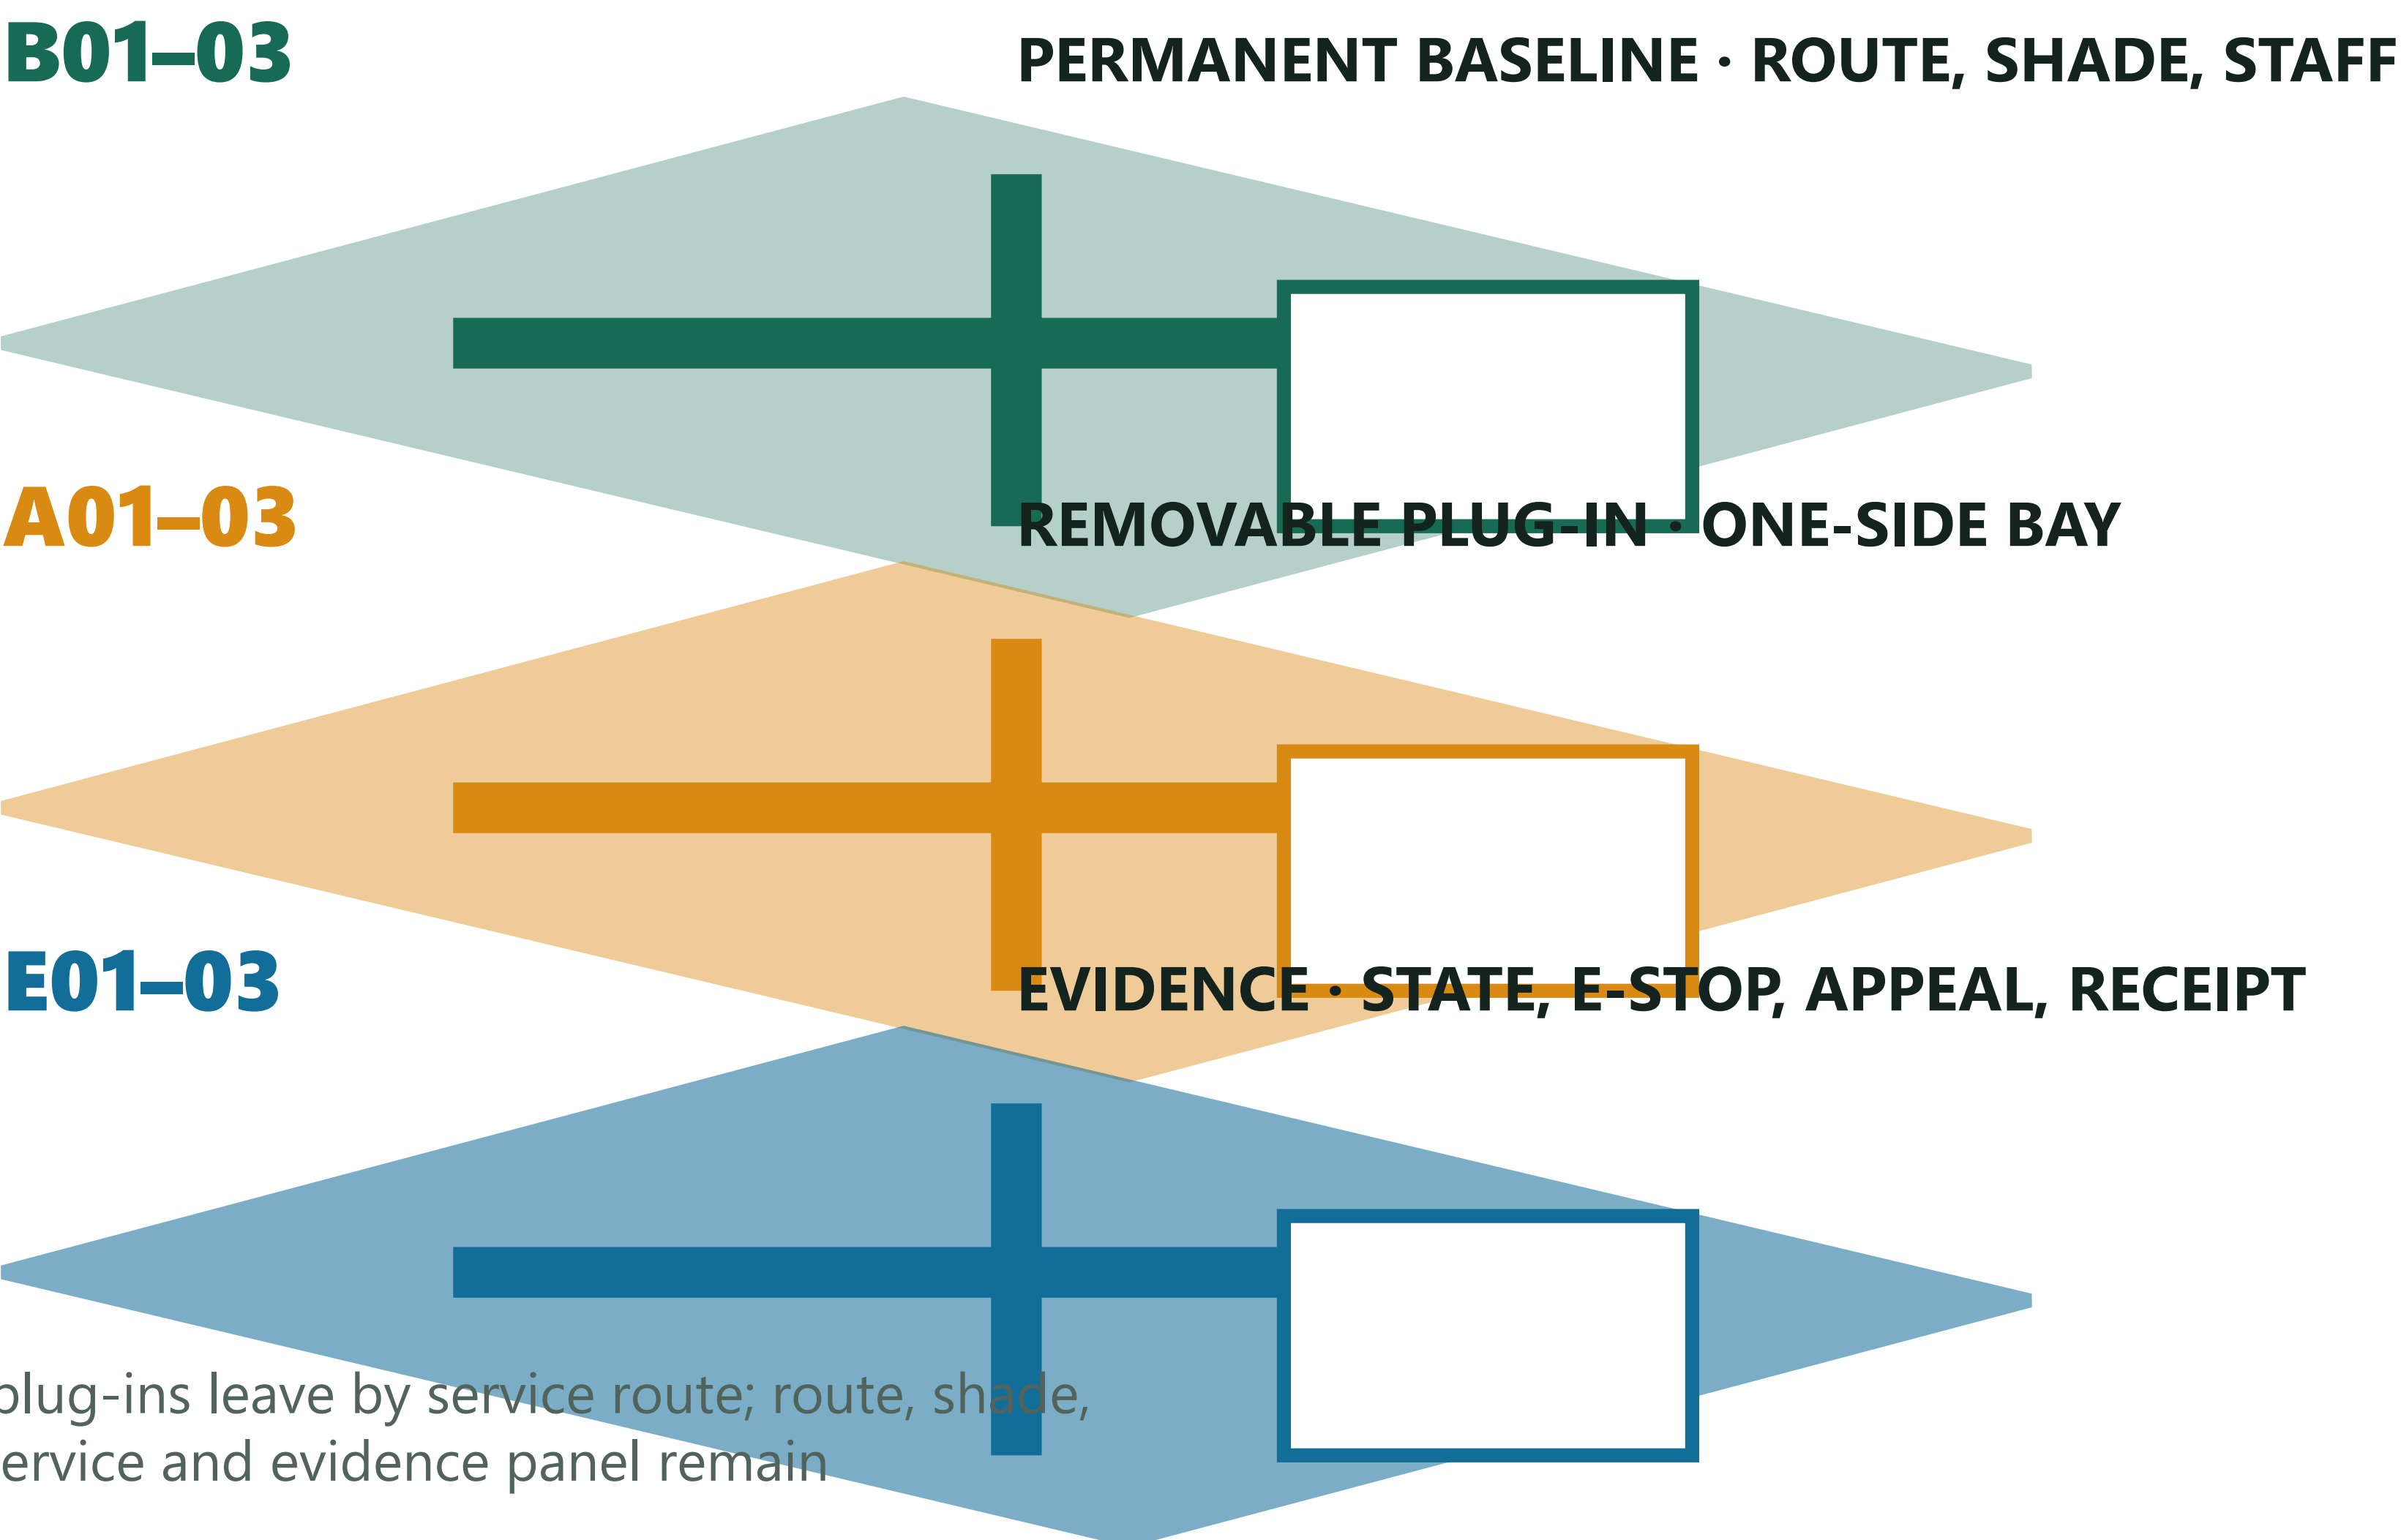

TRIAL DAY · PUBLIC-BUFFER-BAY-PORCH

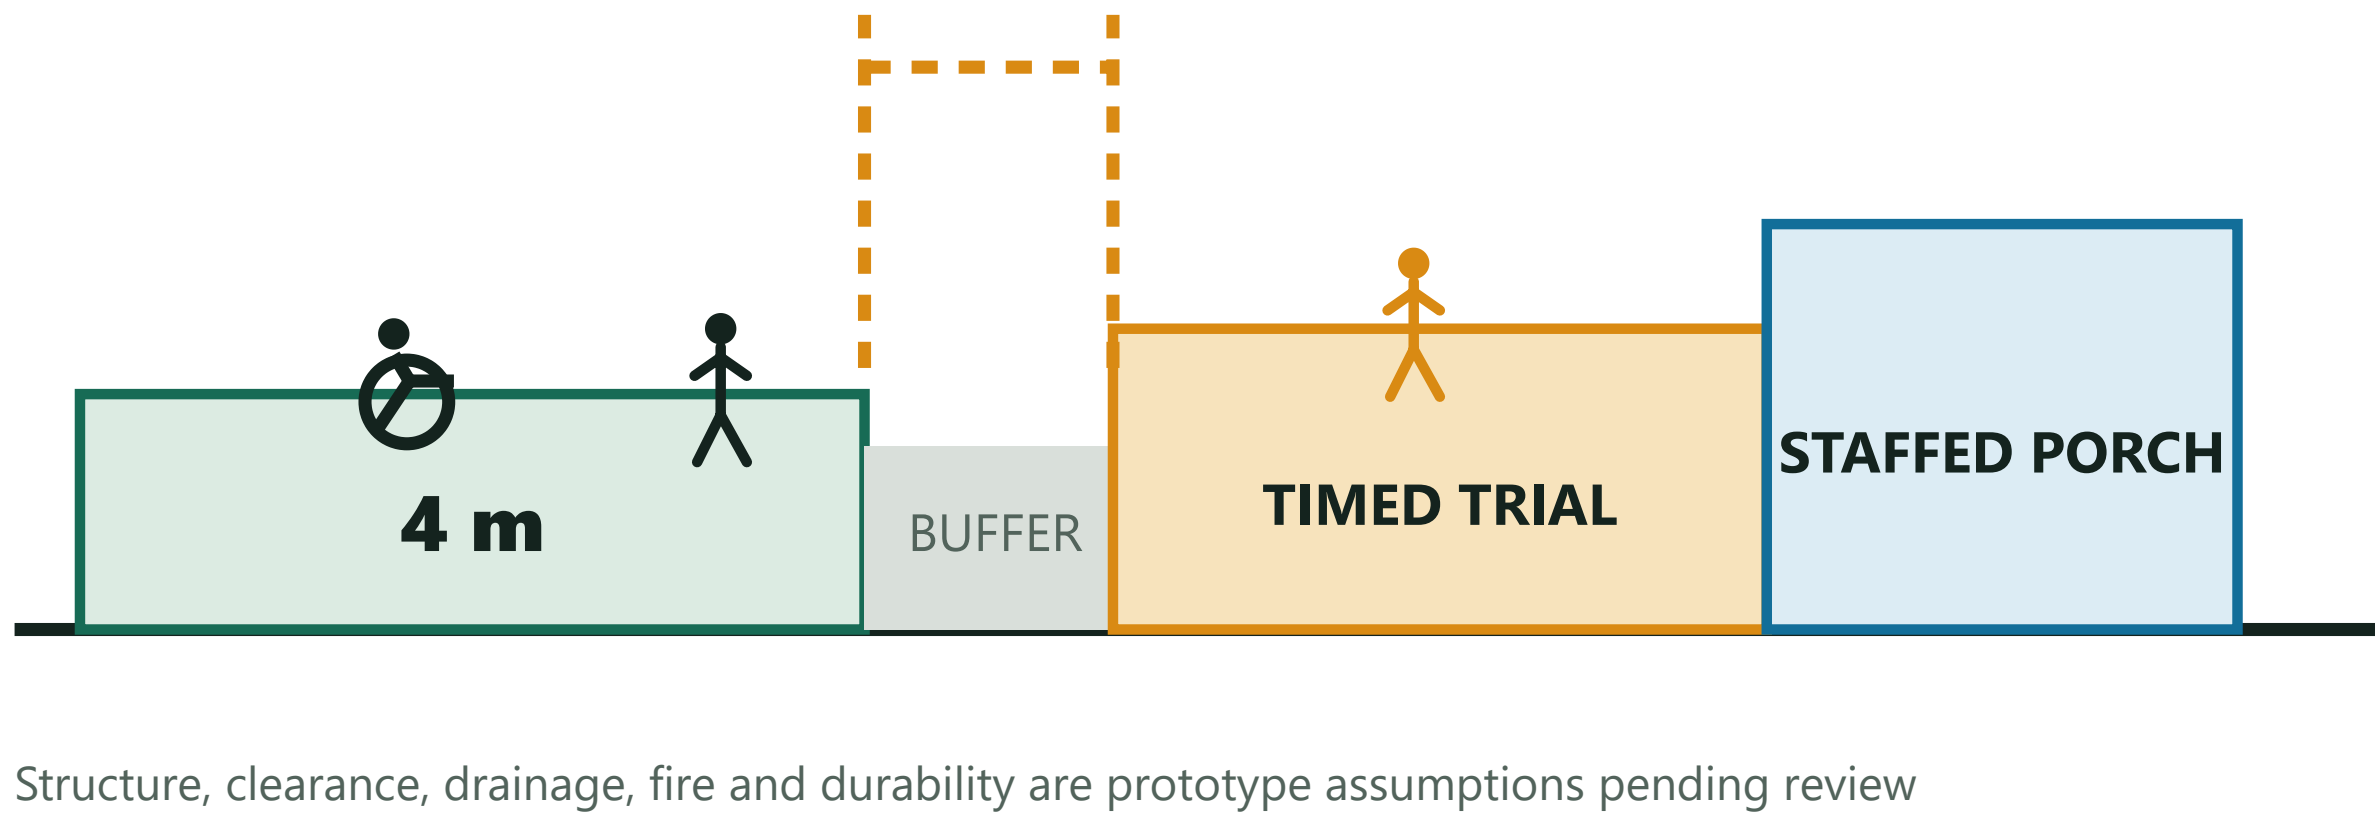

1:50 / 1:20 REVERSIBLE NODES · PUBLIC LAYER FIRST

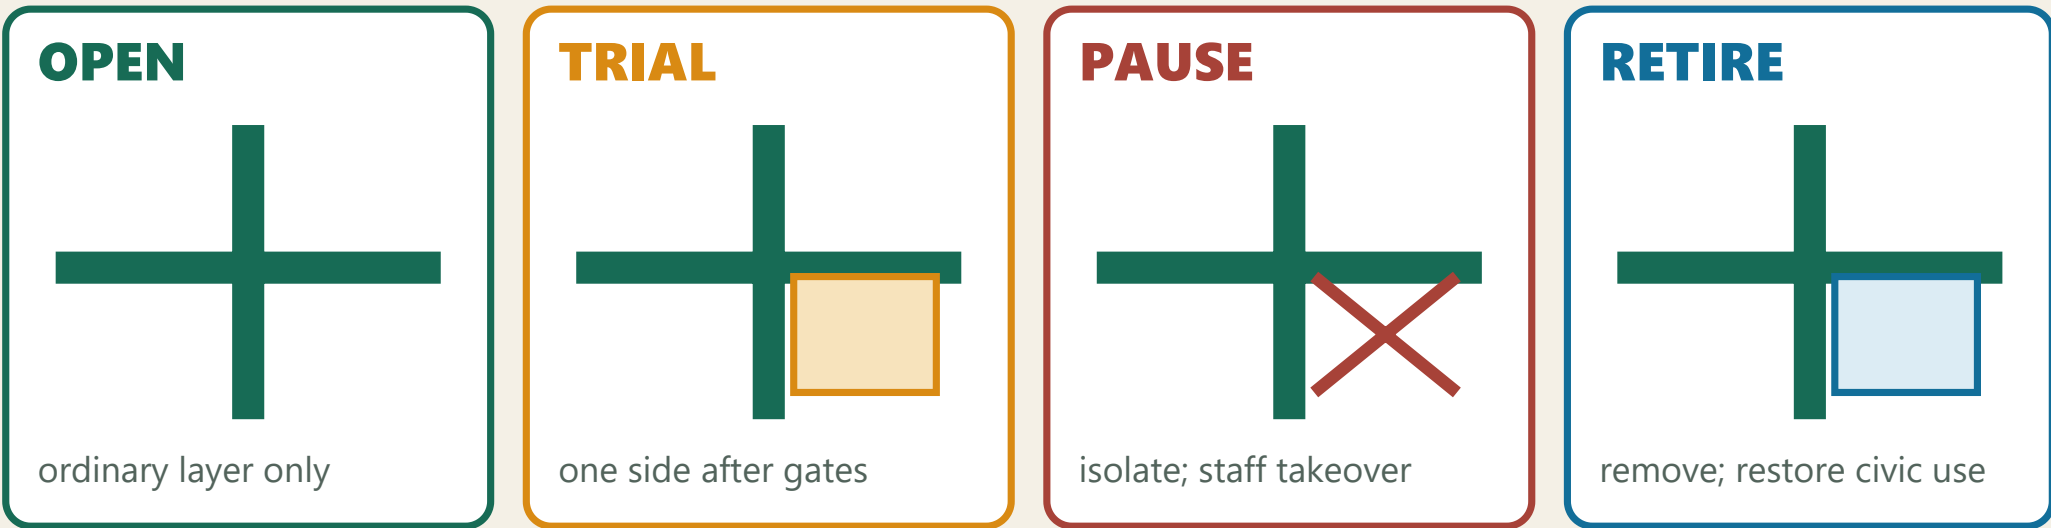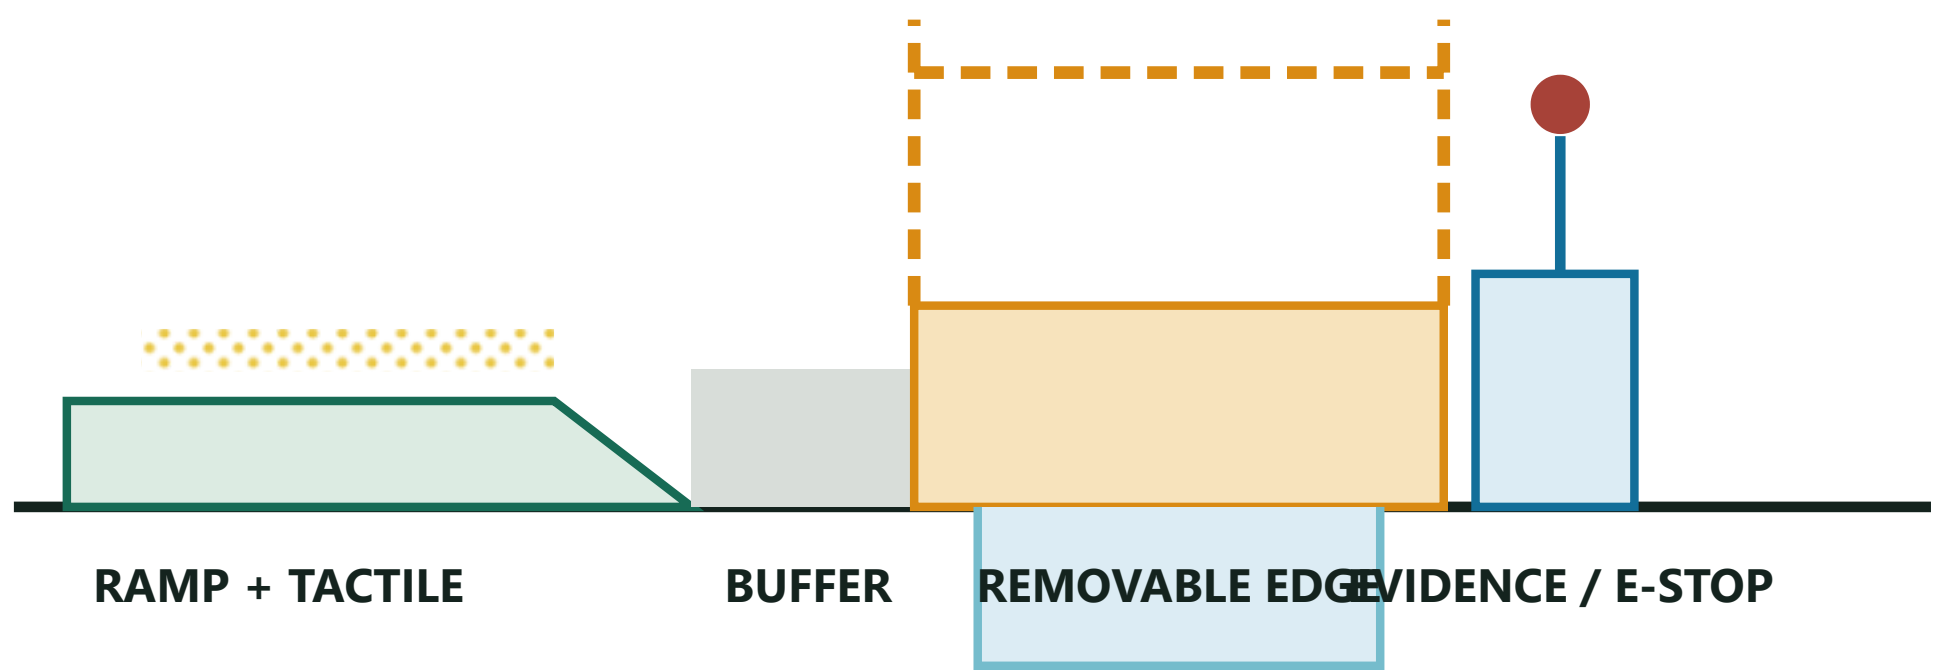

S7 PRE-FEASIBILITY · PARTICIPANT-READY / EXTERNAL HOLD

Capacity, staffing, cost, dependencies and acceptance share one reproducible input

01

12

PERSON DESIGN CAP

48 SQM PORCH

4 sqm/person comfort assumption

TWO 4M ROUTES

excluded from occupancy; always clear

5M GEOMETRY DISTANCE

half diagonal; not statutory egress

TRIAL BAY

no public occupancy; accountable staff only

02

2.28

FTE-EQUIVALENT

BASELINE 1.20

40 h/week + 20% relief

VENUE 0.36

12 h/week + 20% relief

SAFETY 0.36

independent from baseline service

DATA 0.36

vendor support cannot replace duty

03

7 / 3

COST CLASSES / ROM CASES

LOW / BASE / HIGH

rate inputs 0.8 / 1.0 / 1.2

10% + 15% + 20%

design / logistics / uncertainty

12% RESTORATION RESERVE

of removable works, outside base ROM

FORMAL TOTAL BLANK

scope-mismatch stays pending_quote

04

10

CRITICAL DEPENDENCIES

ACCEPTANCE 8 + 4

8 design-judgeable; 4 field-dependent

PERMITS 0 / 8

any open gate blocks TRIAL

QUOTE / OPERATOR 0

no verified quote or named operator

CURRENT STATUS


participant package ready; external HOLD

Capacity, FTE and ROM are participant assumptions; survey, specialist review, budget authority and field performance remain pending.

ONE YARDSTICK · THREE OPTIONS, ONE PUBLIC REJECTION

ALT-A

CENTRAL MIXING

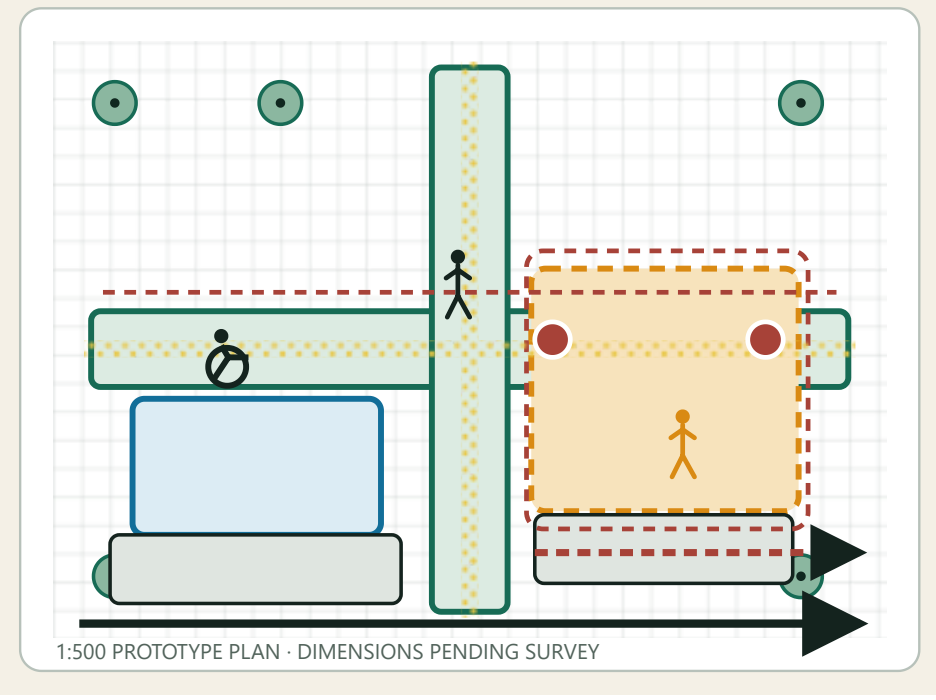


REJECT · CUTS PUBLIC CROSS

Hard conflict among public, fire and removal routes.

ALT-B

SPLIT BAYS

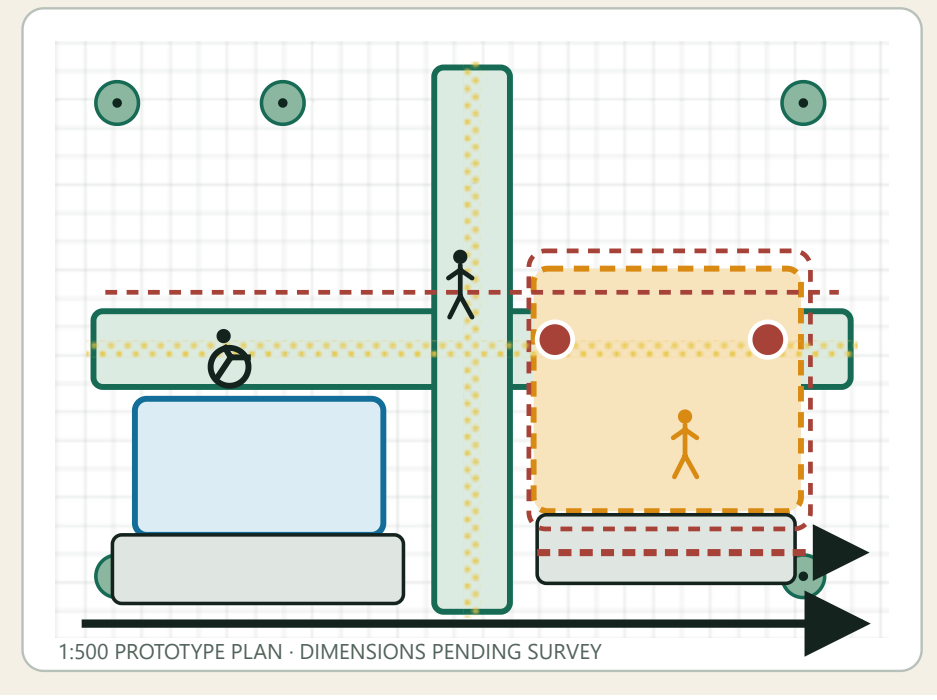


REVISE · FRAGMENTED CONTROL

Routes remain but posts and exit are dispersed.

ALT-C

ONE-SIDE BAY

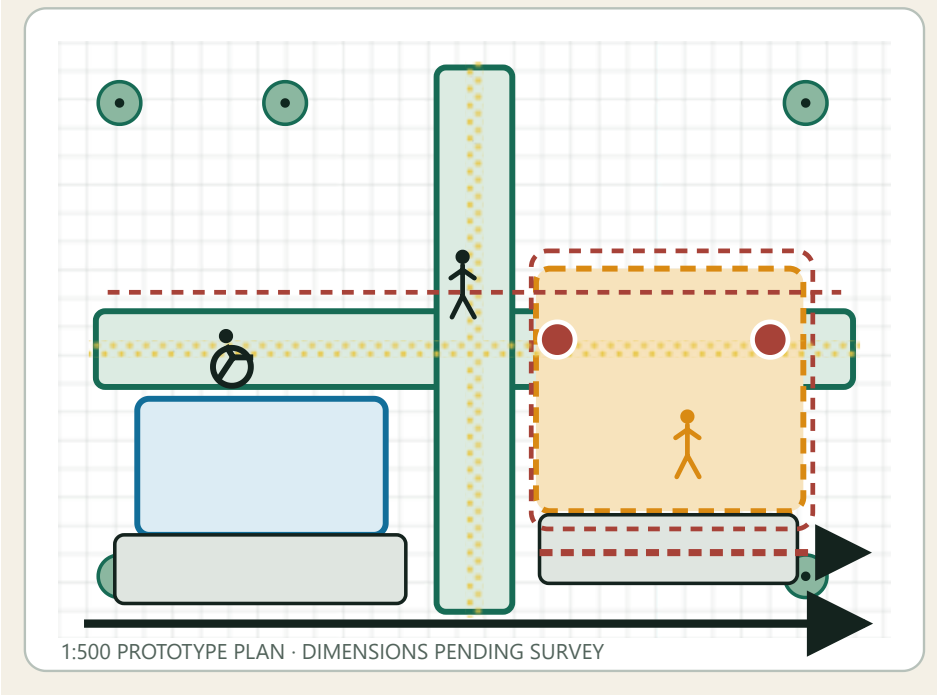

ADVANCE · ROUTE CONTINUOUS

AI is concentrated; posts, e-stop and exit are reachable.

Result comes from local-metric geometry audit; it is not field traffic, safety or acceptance evidence.

reject_design / revise_design / advance_design ≠ adopt / revise / stop

ORDINARY OPEN DAY FIRST · 90 DAYS ARE FIVE ENTRY GATES

DAY 0-15

survey/title/entrance/utility/fire

FAIL → DO NOT ADVANCE

DAY 16-30

build public route/waiting/shade/staff only

FAIL → DO NOT ADVANCE

DAY 31-45

record 7 ordinary operating days

FAIL → DO NOT ADVANCE

DAY 46-75

timed trial after permits + posts

FAIL → DO NOT ADVANCE

DAY 76-90

stop drill/removal/public receipt

FAIL → DO NOT ADVANCE

COMPONENT-PERMIT-MAINTENANCE LINKS TO DRAW

B01-03

route/shade/staff

daily: retain

A01-03

bay/cabinet/terminal

before trial; remove

E01-03

state/e-stop/receipt

open/close review; retain panel

MAT-01-05

dry frame/screen/base/paving/panel

specialist review; reversible

RESPONSIBILITY + NEXT GATE

01

VENUE LEAD

PENDING

02

BASELINE SERVICE

PENDING

03

SAFETY LEAD

PENDING

04

DATA RECORDER

PENDING

CURRENT G0 · SURVEY + PERMIT PREP

PENDING_MARKET_QUOTE · NOT BUILT · NOT FIELD-RUN

Prices remain formulas only; failed permit, post, baseline or removal drill blocks AI trial.

participant decisions documented · permits, quotes, operator and field results remain HOLD